


## INSTRUCTION OF RECEIVER ESRC-02

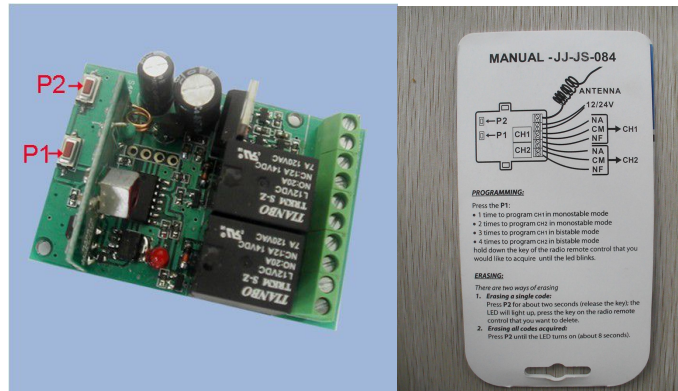

### 1. Add Channel 1:

Press P1 (Picture 1) 1 time to program CH1(Picture 2), LED light 1s and goes off, then you can press button A (for example), then code would be learnt, and LED would be off.

### 2. Add Channel 2:

Press P1 (Picture 1) 2 times to program CH2(Picture 2), LED light 1s and goes off, then you can press button B (for example), then code would be learnt, and LED would be off.


### 3. Delete Single Channel:

Press P2 for about 2 s, the LED will light up, press the key on the remote control what you want to delete.

### 4. Delete All:

Press P2 until the LED turns on (about 8s)

## INSTRUCTION OF RECEIVER ESRC-02

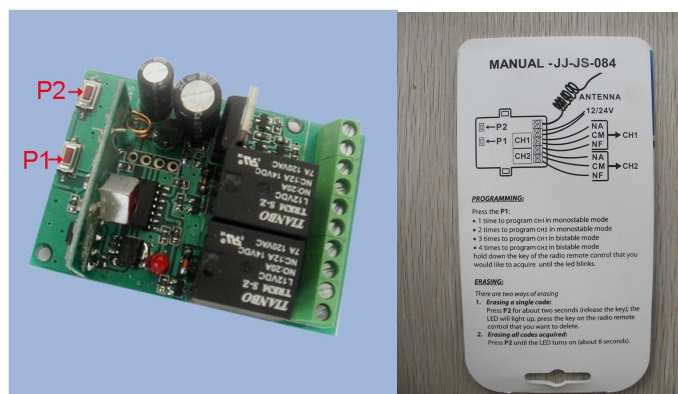

### 1. Add Channel 1:

Press P1 (Picture 1) 1 time to program CH1(Picture 2), LED light 1s and goes off, then you can press button A (for example), then code would be learnt, and LED would be off.

### 2. Add Channel 2:

Press P1 (Picture 1) 2 times to program CH2(Picture 2), LED light 1s and goes off, then you can press button B (for example), then code would be learnt, and LED would be off.

### 3. Delete Single Channel:

Press P2 for about 2 s, the LED will light up, press the key on the remote control what you want to delete.

### 4. Delete All:

Press P2 until the LED turns on (about 8s)